

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: 78101341.2

(51) Int. Cl.<sup>2</sup>: **B 65 B 3/04, A 23 C 9/12**

(22) Date of filing: 09.11.78

(30) Priority: 10.11.77 US 850410  
28.08.78 US 937598

(71) Applicant: **Stussl, William Eugene, 8505 Roanoke Road, San Gabriel California 91775 (US)**

(43) Date of publication of application: 30.05.79  
Bulletin 79/11

(72) Inventor: **Stussl, William Eugene, 8505 Roanoke Road, San Gabriel California 91775 (US)**


(54) Designated Contracting States: BE CH DE FR GB NL SE

(74) Representative: **Patentanwälte Dipl.-Ing. A. Grünecker, Dr.-Ing. H. Kinkeldey, Dr.-Ing. W. Stockmair, Dr. rer. nat. K. Schumann, Dipl.-Ing. P. Jakob, Dr. rer. nat. G. Bezdol Maximilianstrasse 43, D-8000 München 22 (DE)**

**(54) Method for filling containers with sundae-style yogurt.**

(57) A method for filling containers with 'sundae-style' yogurt includes the steps of placing a transparent lid (20) over the top of a container (16), and providing an opening (18) in the bottom of the closed, empty container. The container is inverted to position the lid at the bottom of the container, with the opening being foremost. A fruit fraction (28) is introduced through the opening to form a layer of fruit preserves overlying the inside surface of the lid. The remainder of the container is filled with a bacteriologically inoculated, gum stabilized liquid milk fraction (32) introduced through the opening. The opening is then sealed, and the filled inverted container is incubated so that fermentation of the liquid milk fraction produces yogurt (55). The inverted container is refrigerated to solidify the stabilizers in the yogurt. The container is then positioned in the normal upright position, providing a container of yogurt with sufficient gel strength to support the more dense top layer of fruit preserves. In an alternative embodiment, a container (60) in an upright position is partially filled with an inoculated, gum stabilized liquid milk fraction (32) which is then incubated and subsequently refrigerated in a sterile environment to produce gum stabilized yogurt (72). A layer of fruit preserves (76) is then added to the top surface of the yogurt which has sufficient gel strength to support the fruit layer. A lid (78) is then applied to the container,

providing 'sundae-style' yogurt having a fruit preserve topping immediately inside the lid. Techniques are also disclosed for inhibiting intermingling of fruit preserves with the liquid milk or yogurt fraction by providing a water-insoluble, semi-solid edible barrier (74) of hydrogenated animal fat or hydrogenated vegetable oil at the interface between the fruit preserves and the liquid milk or yogurt fraction.

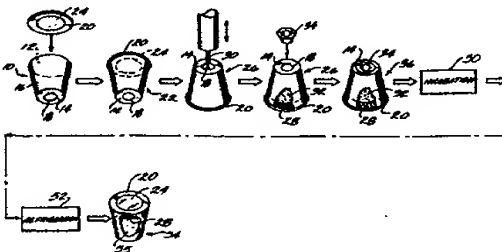

0002037

PATENTANWÄLTE

A. GRÜNECKER

DPL-ING.

H. KINKELDEY

DR-ING.

W. STOCKMAIR

DR-ING. - AGRICULTUR

K. SCHUMANN

DR. RER. NAT. - DPL.-PHYK.

P. H. JAKOB

DPL-ING.

G. BEZOLD

DR. RER. NAT. - DPL.-CHEM.

1

5

STUSSI, WILLIAM EUGENE

8 MÜNCHEN 22  
MAXIMILIANSTRASSE 49

9. Nov. 1978

EP 28

-1-

10

METHOD FOR FILLING CONTAINERS WITH SUNDAE-STYLE YOGURT

15

Cross-Reference to Related Application

This is a continuation-in-part of application  
Serial No. 850,410, filed November 10, 1977.

20

Background

25

This invention relates to commercial methods for  
adding fruit or similar flavors to yogurt, and more  
particularly, to techniques for filling containers with  
"sundae-style" yogurt in which a top layer of fruit  
preserves overlies yogurt in the bottom of a container,  
and in which the fruit preserves are immediately inside  
a lid which closes the top of the container.

30

Yogurt is a very nutritious dairy product which  
generally contains cultures of two bacteria (Lactobacil-  
lus bulgaricus and Streptococcus thermophilus) that aid  
in the digestive process. In addition to the basic  
nutritional value of plain yogurt, a vast number of  
consumers will only eat yogurt that is fruit flavored,  
rather than plain yogurt.

35

-2-

1           At the present time, fruit flavored yogurt is  
commonly sold in several styles, including a "fruit-on-  
the-bottom" style in which a layer of fruit preserves is  
5       rest of the container, or Swiss style yogurt in which  
fruit preserves are folded into pre-set, stabilized  
batch-processed yogurt.

          The usual procedure for producing fruit-on-the-  
bottom yogurt is to initially inject, under pressure,  
10       approximately 1-1/2 ounces of fruit preserves onto the  
bottom of an empty container on a high speed (120 units  
per minute) filling line. Immediately thereafter, the  
remainder of the container is filled with a bacterio-  
logically inoculated, gum stabilized liquid milk, after  
15       which the filled container is closed with a removable  
opaque lid. The filled containers are then cased and  
incubated for a period of 4 to 8 hours so that fermenta-  
tion of the culture in the liquid milk produces yogurt.  
The containers of yogurt are then refrigerated to coagu-  
20       late or solidify the stabilizers in the yogurt, and the  
containers are finally shipped to retail stores or  
markets.

          A variety of animal and/or vegetable gum stabilizers  
are commercially added to the inoculated liquid milk  
25       solution to provide a commercially desirable increase in  
the viscosity of the yogurt upon incubation and subse-  
quent refrigeration. Such stabilizers have been used in  
fruit-on-the-bottom and Swiss style fruit flavored yogurt.

          Stabilizers such as modified corn or tapioca starch  
30       are also added to the fruit preserve layer to inhibit  
bacteria in the yogurt from attacking sugars in the fruit  
preserve layer.

          Fruit-on-the-bottom yogurt suffers from a number of  
disadvantages. There is a major unwillingness on the part  
35       of consumers, many of whom are children, to stir up the

1 fruit from the bottom of the container, or to eat only  
plain yogurt until reaching the fruit preserve layer at  
the bottom of the container. Further, during storage,  
there is an essentially unavoidable "wheying out" of the  
5 liquid whey fraction of the yogurt, in which some of the  
whey naturally present in the yogurt separates from the  
yogurt and seeps to the bottom of the container. In fruit-  
on-the-bottom yogurt, whey that seeps into the bottom of  
the container reduces the effectiveness of the stabilizers  
10 in the fruit layer and dilutes the fruit preserves, con-  
verting the fruit layer to an unattractive soupy mass, as  
well as disrupting the natural flavor of the fruit pre-  
serves.

Prior to this invention, it was not thought possible  
15 to commercially produce a container of sundae-style  
yogurt in which a top layer of fruit preserves is supported  
above the yogurt. The inoculated liquid milk fraction,  
with or without added stabilizers, is a watery solution,  
even after the incubation step produces yogurt (i.e.,  
20 prior to refrigeration). The milk or yogurt fraction has  
a lower specific gravity than the fruit preserves, and  
therefore the milk or yogurt fraction (prior to refrigera-  
tion) will not support a top layer of fruit preserves.  
The fruit preserves sink to the bottom of the container.  
25 Hence, it has become standard practice in the industry  
to prepare and market fruit-on-the-bottom yogurt.

#### Summary of the Invention

30 This invention provides a commercial method for  
preparing and filling containers with sundae-style yogurt  
in which a top layer of fruit preserves having a specific  
gravity greater than that of yogurt is self-supported by  
yogurt in the bottom of the container, and in which the  
35 fruit preserves are immediately inside a lid at the top

1 of the container.

According to one method for carrying out the invention, one end of a container has a removable lid, and an opposite end of the container has an opening for providing access to the interior of the closed, empty container. The container is inverted so the lid is at the bottom and the opening is foremost. A fruit fraction is introduced through the opening of the container to form a fruit fraction layer resting on the inside surface of the lid. The remainder of the container is thereafter filled above the fruit fraction layer with an inoculated liquid milk fraction introduced through an opening. The opening is sealed, say by a plug press-fitted into the opening, and the liquid milk is then incubated and subsequently refrigerated in the inverted container so that fermentation produces yogurt. The yogurt has sufficient gel strength to support the more dense fruit fraction layer when the container is positioned in the normal upright position for consumer use.

In an alternative form of the invention, a normally upright container is partially filled with an inoculated liquid milk fraction containing one or more gum stabilizing agents, and a sterile environment is provided so the liquid milk fraction can be incubated and subsequently refrigerated in the container. Fermentation in the presence of the stabilizer produces a "set" yogurt. A fruit fraction layer having a higher specific gravity than the yogurt is then introduced to the container to cover the top surface of the set yogurt, providing a container filled with yogurt self-supporting a top layer of fruit.

According to another embodiment of the invention, an edible barrier film is provided at the interface between the fruit fraction and the inoculated liquid milk or yogurt fraction. The edible barrier inhibits intermingling of the fruit fraction with the milk or yogurt fraction at the interface between them. Preferably, the edible

0002037

-5-

1 barrier comprises a semi-solid, water-insoluble, oil  
soluble edible material which preferably remains semi-  
solid at temperatures above either the temperature of  
the liquid milk or yogurt fraction during incubation or  
5 subsequent refrigeration temperature.

These and other aspects of the invention will be  
more fully understood by referring to the following  
detailed description and the accompanying drawings.

10

15

20

25

30

35

1        Drawings

5        FIG. 1 is a schematic diagram illustrating a process for filling containers with sundae-style yogurt according to principles of this invention;

FIG. 2 is a schematic perspective view, partly in cross-section and partly broken away, showing a first alternative container which can be used in the process illustrated in FIG. 1;

10       FIG. 3 is a schematic perspective view, partly in cross-section and partly broken away, showing a second alternative container which can be used in the process illustrated in FIG. 1;

15       FIG. 4 is a schematic perspective view, partly in cross-section and partly broken away, showing a third alternative container which can be used in the process illustrated in FIG. 1;

20       FIG. 5 is a schematic perspective view, partly in cross-section and partly broken away, illustrating a means for inhibiting intermingling of a fruit fraction at the interface of a liquid milk or yogurt fraction in the process of FIG. 1; and

25       FIG. 6 is a schematic perspective view illustrating an alternative process for filling containers with sundae-style yogurt.

30

35

1      Detailed Description

FIG. 1 illustrates a "single-pass" process for filling containers with fruit-on-the-top sundae-style yogurt in which a set yogurt in the bottom of a container has a top layer of fruit preserves immediately inside a lid which closes the top of the container. The process of FIG. 1 is practiced with an empty container 10 having an open top 12, a bottom wall 14, a side wall 16 which tapers wider toward the top of the container, and a circular opening 18 formed in the bottom wall 14 of the container. As an alternative to the circular opening 18, the process of FIG. 1 can be practiced with a container 38 (see FIG. 2) having an X-shaped region 40 formed in a bottom wall 41 of the container. The X-shaped region can be a cut, a perforation, a scoreline, or a weakened area preferably located in the center of the container bottom wall 41.

Referring again to FIG. 1, a removable lid 20 is applied to the empty, upright container to provide a closed, empty container 22. The removable lid 20 is preferably the type having a see-through, transparent region 24 preferably in its center, as shown in FIG. 1, or a totally transparent plastic lid. The lid also preferably has a flat inside surface facing the interior of the closed container. The opening 18 provides a means for access to the interior of the closed, empty container 22. The closed, empty container 22 thus has a removable lid with a flat inside surface at one end of the container and an opening in an opposite end of the container spaced from the removable lid.

The closed, empty container is then inverted by running it through a twisted track or tunnel (not shown) to flip the container 180° so that the inside of the

1 transparent lid 20 provides a horizontal floor of the  
closed, empty container shown in its inverted position  
at 26 with the opening 18 being spaced above the lid.

5 A layer of any of a variety of fruit flavoring  
material 28, hereafter called a fruit fraction, is  
placed on the inside surface of the lid of the inverted  
container. The fruit fraction is deposited in a layer  
of generally uniform thickness in the bottom of the in-  
verted container. The fruit fraction can be a layer  
10 of fruit preserves, pieces of fruit cocktail, or any  
other desired flavoring material. In one embodiment,  
pieces of fruit cocktail can be deposited in a uniform  
layer on the inside surface of the lid, and a liquid  
gelatin solution in desired flavors then can be poured  
15 through the opening to the level of the fruit cocktail  
pieces and the opening 18 can be plugged, after which  
the inverted container is refrigerated until the gelatin  
sets.

20 The fruit preserves can include stabilizers such as  
low molecular weight, hydrophillic hydrocolloids (e.g.,  
seaweed extractives such as agar-agar, or some bean exud-  
ates, such as locust bean gum), or high molecular weight,  
hydrophobic hydrocolloids (e.g., modified corn or tapioca  
25 starches) to inhibit bacteria in the yogurt from attack-  
ing sugars in the fruit preserve layer. The fruit frac-  
tion is deposited in the bottom of the inverted container  
under pressure by a conventional filling nozzle or probe  
30. The nozzle is held in a fixed position above the  
opening 18 in the container, and the fruit preserves are  
30 injected as a spray or blast under pressure through the  
opening in the container bottom wall 14 to deposit the  
fruit preserves on the inside surface of the lid.

Alternatively, the nozzle can be a conventional air-  
actuated reciprocal filling nozzle. Such a nozzle can  
35 be reciprocally forced down through the X-shaped region

-9-

1 40 of the container shown in FIG. 2 so that the probe  
momentarily extends into the interior of the container  
for depositing the fruit fraction on the inside surface  
of the lid. In the instance where the X-shaped region  
5 40 comprises a previously cut X-shaped opening, the  
nozzle in its downward movement simply pierces through  
the X-shaped opening to gain access to the interior of  
the container for depositing the fruit fraction. Alter-  
natively, the X-shaped region 40 can be a weakened area  
10 or a scoreline, and the remote end of the nozzle 30 can  
be formed as a puncturing device. In its downward  
movement such a nozzle can puncture an X-shaped opening  
in the container bottom by punching down on the X-shaped  
scoreline or weakened area in the container bottom. By  
15 forming an X-shaped cut or opening, hinged or flexible  
right angle portions of the container bottom surround  
the X-shaped cut or opening. These flexible portions  
of the container bottom are at least partially closed  
by the retracting movement of the nozzle 30 away from  
20 the opening or cut in the container bottom.

The inverted container 26 then passes to a station  
for filling the remainder of the container with a  
bacteriologically inoculated, uncultured, liquid milk  
fraction 32, preferably with added stabilizers described  
25 below. A standard filler nozzle held in a fixed posi-  
tion above the opening 18 is used to inject the liquid  
milk solution through the opening and into the container  
interior above the fruit fraction layer. Alternatively,  
a standard conventional air-actuated reciprocating  
30 filling nozzle or probe similar to the nozzle 30 can be  
used to inject the liquid milk through the opening to  
penetrate the previously opened X-shaped region in the  
container bottom to fill the rest of the container with  
the liquid milk fraction.

35 The liquid milk fraction preferably is in direct  
contact with the layer of fruit preserves when the milk

-10-

1 fraction fills the container. The liquid milk fraction normally occupies about 80% of the volume of the container, with the balance being the fruit fraction.

5 The layer of fruit preserves remains essentially uniform in thickness while supporting the weight of liquid milk fraction above it. The container can be shaped so that the weight of the liquid milk above the fruit preserve does not disrupt the uniformity of the fruit preserve layer.

10 Subsequent to filling the inverted container with the fruit fraction 28 and the liquid milk fraction 32, the individual containers continue along a conveyor to a station for automatically inserting a plug 34 in the upwardly facing opening 18 in the container bottom for sealing the opening. Preferably, the plug 34 has a cylindrical  
15 body which is slightly oversized to make a tight friction fit in the container opening 18. The plug has an outer flange or lip which overlies the upwardly facing exterior surface of the container bottom wall 14 after the body of the plug is inserted in the opening 18. The overlying flange and oversized body of the plug cooperate to inhibit leakage  
20 through the opening when the container is later positioned in its normal upright position. Alternatively, a food grade permanent adhesive-backed, pressure-sensitive label or seal 42 (see FIG. 2) can be adhesively secured or bonded  
25 to the container bottom to seal either the opening 18 or the X-shaped region 40. The plug 34 or the seal 42 seals in the contents of the container throughout the remaining processing steps, as well as during shipping, distribution, and consumer use. Such a sealed container is shown in its  
30 inverted position at 36.

FIG. 3 illustrates a second alternative container 44 which comprises a hollow stemmed, goblet-shaped plastic cup. In this instance, a bottom flange 114 of the cup has a circular opening 118 which extends through a hollow portion  
35 of the stem and into the interior of the container.

-11-

1       Reciprocating probes (not shown) can be inserted through the  
opening 118 to fill the container interior with the fruit  
fraction 28 and the liquid milk fraction 32. A plug 134  
5       similar to the plug 34 is then inserted in the opening 118  
to seal in the contents of the container 44.

      The containers shown in FIGS. 1, 2 and 3 facilitate  
sealing the contents relatively easily and quickly when using  
the seals 34, 42 and 134, respectively. For example, the  
circular opening 18 shown in FIG. 1 occupies only a minor  
10       portion of the surface area of the container bottom 14.  
Thus, the remainder of the container bottom provides a rigid  
base entirely surrounding the opening to which the seal is  
applied. This facilitates applying the plug 34 in a  
commercial plugging process, using the rigidity of the plastic  
15       container bottom surrounding the opening as a means of  
support for the flange or lip of the plug. A Resina plugger  
(Resina Innersealer Model L Series, Resina Automatic  
Machinery Co., Inc., Brooklyn, New York) can be used for  
automatically inserting the plug 34. This requires only a  
20       relatively short amount of time for the sealing step, and  
thereby aids in avoiding contamination problems which can  
arise if the container with the inoculated milk fraction is  
left open for an appreciable length of time. The portions  
of the container bottoms 41 and 114 shown in FIGS. 2 and  
25       3 provide similar rigidity surrounding the X-shaped region  
40 and the opening 118, respectively, during the sealing  
process.

      FIG. 4 illustrates a further alternative container 46  
having a completely open bottom facing upwardly when the  
30       container is inverted. The container 46 is filled with  
the fruit fraction 28 and subsequently the liquid milk  
fraction 32, after which the upwardly facing opening in  
the container bottom is sealed by bonding a flat bottom  
wall or disc 48 to the upwardly facing opening of the  
35       container. The container shown in FIG. 4 can be sealed

-12-

1 by overlaying the container bottom disc 48 and bonding  
it, say by heat sealing, to the side wall of the container.  
As an alternative, the bottom opening can be closed by a  
cap which makes a friction fit with the side wall of the  
5 container.

Following the sealing step, the inverted container  
is placed in an incubator represented at 50 for about 4  
to 8 hours at about 100°F to 120°F so that fermentation of  
the culture in the liquid milk fraction produces yogurt.  
10 The yogurt following incubation is still watery and requires  
refrigeration to solidify the soluble stabilizers in it. The  
containers with the cultured milk or yogurt are removed from  
the incubator and placed in a refrigerator represented at  
52. The containers remain in their inverted position during  
15 refrigeration which produces yogurt 55 capable of self-  
supporting the layer of fruit preserves 28, even though  
the fruit preserves have a higher specific gravity than  
the yogurt. Following refrigeration, the containers are  
inverted again to their normal upright position shown at 54  
20 to provide a container of sundae-style yogurt in which the  
yogurt 55 is on the bottom of the container and a layer of  
fruit preserves 28 is on the top of the yogurt immediately  
inside the removable transparent lid.

Use of stabilizers in the fruit fraction for inhibiting  
25 bacterial attack of the fruit fraction maintains sufficient  
stratification between the adjacent fruit layer and the  
yogurt after the container is placed right-side-up that a  
commercially desirable appearance of the fruit preserves  
can be maintained beneath the transparent lid. The sundae-  
30 style yogurt provided by this invention permits the fruit  
preserve top layer to be viewed either through a trans-  
parent lid at the top of the container, or after the lid  
is removed. This enhances the attractiveness of the yogurt  
to the average consumer and can contribute to greater  
35 consumer interest, especially when compared with fruit-on-

-13-

1 the-bottom yogurt which is commonly sold in entirely opaque  
containers having a more sterile, i.e., less attractive  
appearance to the average consumer.

5 The liquid milk fraction contains one or more gum  
stabilizing agents in addition to the bacterial inoculum  
or culture. The gum stabilizing agents cause the milk  
solution to gel or solidify upon subsequent refrigeration.  
Such gum stabilizers are known in the art and can include  
10 gelatin of animal origin and a number of gums of vegetable  
origin, such as agar-agar, locust bean gum, modified starches,  
and the like. A bacteriologically inoculated liquid milk  
solution without such added stabilizers will coagulate  
or set and form yogurt upon incubation, but the gel strength  
or viscosity of the yogurt can be improved by the gum  
15 stabilizing agents. The gum stabilizers ensure that the  
yogurt will have sufficient gel strength, following incubation  
and subsequent refrigeration, for self-supporting the more  
dense layer of fruit preserves.

20 The fruit-on-the-top yogurt provided by this invention  
eliminates dilution of the fruit preserve layer by the whey  
that separates from the yogurt upon storage of the yogurt.  
When the container of fruit-on-the-top yogurt is placed in  
the right-side-up position, say during storage, any whey  
that separates from the yogurt seeps toward the bottom of  
25 the container away from the fruit preserve layer, which  
avoids any dilution of the fruit preserve layer and its  
stabilizing agents.

Any whey that separates to the bottom of the container  
of fruit-on-the-top yogurt does not cause the yogurt to  
30 settle to the bottom of the container under gravity. The  
gum stabilizers in the yogurt provide sufficient gel strength  
to resist such settling. Further, the tapered or conical  
configuration of the container can aid in resisting such  
settling of the yogurt. As a result, the fruit preserve  
35 layer above the yogurt is maintained against the underside

-14-

1 of the transparent lid during prolonged storage in the  
right-side-up position. Any tendency of the fruit preserve  
layer to separate and produce a "head space" between the  
fruit and the inside surface of the lid can reduce the  
5 visual attractiveness of the project when viewing it through  
a transparent lid. Since the fruit preserve layer of  
this invention can be constantly maintained in contact  
with the inside surface of the transparent lid, the fruit-  
on-the-top yogurt constantly has an attractive appearance  
10 when oriented in the right-side-up position.

At the interface between the fruit fraction 28 and the  
liquid milk fraction 32 there can be intermingling of the  
two fractions resulting in osmotic pressure differential  
dilution of the higher soluble solids of the fruit fraction.  
15 Although intermingling at the interface is greatly reduced  
by added stabilizers in the fruit fraction, intermingling  
of the two fractions at the interface can be further in-  
hibited by providing an optional semi-solid edible barrier  
56 at the interface. The edible barrier preferably comprises  
20 a water-insoluble material such as a relatively high melting  
point vegetable oil, such as hydrogenated coconut oil, or  
hydrogenated animal fat. Preferably, the edible barrier 56  
is applied by spraying it in film thickness over the entire  
surface of the fruit layer in the process of FIG. 1 prior  
25 to injecting the liquid milk fraction 32 into the container.  
The temperature of the liquid milk fraction during filling  
and incubation is commonly between about 100°F to 120°F.  
The melting point temperature of the edible barrier material  
is higher than the highest temperature of the liquid milk  
30 fraction during filling and incubation, preferably above  
120°F. Thus, when the barrier solution is sprayed over the  
fruit fraction, it immediately solidifies and remains  
solidified throughout filling of the container, incubation,  
refrigeration and consumer use. It thereby provides a  
35 barrier which maintains separation and prevents any inter-  
mingling between the fruit fraction and the liquid milk

-15-

1 or yogurt fraction.

The process of FIG. 1 is especially useful because it is a "single-pass" process which can be completed within a fraction of a minute, in which the fruit fraction and liquid milk fraction are added immediately before and after one another so that the milk fraction is incubated while the fruit fraction is present inside the container. This avoids any potential for contamination which can otherwise be present if the container is filled only with the liquid milk fraction and then temporarily sealed and incubated in a sterile environment, after which the container must be withdrawn from the sterile environment for adding the fruit fraction.

FIG. 6 illustrates an alternative "double-pass" process for filling containers with a fruit-on-the-top sundae-style yogurt. According to the process illustrated in FIG. 6, an empty, normally upright container 60 having an open top 62 is partially filled with the stabilized inoculated liquid milk fraction 32 described above. A standard filling nozzle or probe 64 is used to partially fill the container 60 with the liquid milk fraction 32. The top of the container having the liquid milk fraction is then subjected to a sterile environment, say by covering the container with a temporary seal 66. The temporary seal can be an insert of metal, plastic, waxed paper, etc., or a temporary lid, or a piece of plastic film, waxed paper, or metallic film cut from a web, or the sterile environment can be provided by ultraviolet light without a temporary seal, for example. The liquid milk fraction is exposed to the sterile environment by keeping the top of the container covered by the temporary seal 66, for example during the incubation step 68, during which fermentation of the culture in the liquid milk fraction produces yogurt 72. The temporary seal also seals the contents during the subsequent refrigeration step 70 in which the stabilizers in yogurt are solidified. The container is then withdrawn from the sterile environment, say by

-16-

1 removing the temporary seal 66 after refrigeration.

5 An optional semi-solid edible barrier 56 described above can be deposited on the top surface of the set yogurt 72. Preferably, the edible barrier material 74 is applied by a spray head illustrated at 73. The film solidifies owing to its melting point temperature (crystallization point) being at least higher than the temperature of the yogurt during refrigeration, i.e., above 40°F. Preferably, the melting point temperature of the edible barrier is above about 75°F to ensure that the film will remain semi-solid during consumer use.

15 The edible barrier can be applied after refrigeration, or it can be applied to the top of the liquid milk fraction before incubation. In the latter instance, the barrier material can have a melting point of say 75°F and still be applied in liquid form to the top of a liquid milk fraction having a temperature between 110° to 120°F. In this instance, the barrier film remains in liquid form at the top of the milk fraction, owing to the lower specific gravity of the edible barrier material. Following incubation and during subsequent refrigeration, the barrier film will solidify on the top surface of the yogurt since the temperature of the yogurt is lowered below 75°F during refrigeration. The fruit fraction then can be added to the top of the solidified edible barrier film.

25 Following refrigeration of the liquid milk fraction, the container then passes to a standard air-actuated, reciprocal-acting filling nozzle or probe 75 for depositing a stabilized fruit fraction layer 76 on the top surface of the edible barrier material. In absence of the barrier film, the fruit fraction can be deposited directly on top of the set yogurt, which has sufficient gel strength, following refrigeration, to support the more dense fruit fraction layer. The cup is then capped with a removable transparent lid 78 similar to the lid 20 shown in FIG. 1, and the container is subsequently cased and shipped for marketing.

1    EXAMPLE

More than 500 containers of fruit-on-the-top yogurt were produced according to the following procedure, wherein the steps for preparing one container of fruit-on-the-top yogurt will be described. A one-inch circular hole was formed in the bottom of a standard 8-ounce conical-shaped plastic cup. The cup was placed in a normal upright position and fed into an automated capper which impressed a removable flat see-through lid over the top of the container. The capped, empty container was then inverted by hand and placed on a conventional dairy conveyor belt for feeding the container to a Bock 300 (Bock-Haskon, Inc., St. Paul, Minnesota) filler/depositor. 1-1/2 ounces of fruit preserves were injected by the depositor through the hole in the upwardly facing bottom wall of the inverted container. The preserves were injected by a fixed (non-retractable) depositor nozzle held about 1/4-inch above the hole in the container bottom. Conveyor and depositor speed was 120 containers per minute and several different types of fruit preserves were injected into the containers. The injected fruit preserves typically covered about 2/3 the area of the inside surface of the lid, and after injection, the container was shaken by hand to uniformly distribute the preserves over the entire surface area of the lid. A conventional merry-go-round Federal Filler was used to fill the remainder of the container with a stabilized, bacteriologically inoculated liquid milk solution. The gum stabilizer used in the liquid milk solution was agar-agar in the amount of about 0.5% of the liquid milk fraction, by weight. Filling speed was 120 cups per minute. After the container was filled, the bottom of the container was hand plugged with a 1.2-inch O.D. plastic plug (identical to plug 34) shown in FIG. 1) which made a tight friction fit inside the hole in the container bottom. The plugged container

-18

1 was left in the inverted position and placed in incubation  
for 5 hours so that fermentation of the culture in the  
milk fraction produced yogurt. The inverted container  
was then refrigerated overnight at about 40°F to solidify  
5 the stabilizer and complete coagulation of the yogurt.  
Approximately 90% of the solidification of the yogurt  
was contributed by the agar-agar stabilizer, and the  
remaining approximately 10% was contributed by natural  
gelatinization provided by the fermentation. The container  
10 was removed from the refrigerator and inverted to the  
normal upright position. The fruit preserve layer remained  
as a separate, discrete layer, self-supported by the  
set yogurt, with essentially no intermingling with the  
yogurt, and the fruit preserves remained in contact with  
15 the inside surface of the transparent lid for a  
prolonged time period of eight weeks and more.

Thus, the invention provides techniques for filling  
containers with a fruit-on-the-top sundae-style yogurt in  
which the yogurt and fruit fractions can be deposited in  
20 containers quickly and easily in a commercial production  
line process under conditions which can avoid contamination  
problems, while producing an end-product in which the fruit  
fraction remains separated or in a discrete layer supported  
by the gel strength of the set yogurt.

25

30

35

1     WHAT IS CLAIMED IS:

- 5             1.    A process for filling containers with fruit-on-the-top sundae-style yogurt comprising the steps of:  
                  providing a container 16 having a removable  
                  lid 20 which closes one end of the container and having  
                  an opening 18 at an opposite end of the container for  
                  providing access to the interior of the container, the  
10            container being inverted so the lid is positioned at  
                  the bottom of the container and the opening is foremost;  
                  introducing a fruit fraction 28 through the  
                  opening and into the interior of the inverted container  
                  to form a fruit fraction layer on the inside surface of  
                  the lid;  
15            introducing a bacteriologically inoculated  
                  liquid milk fraction 32 through the opening of the  
                  inverted container into the interior of the container  
                  above the fruit fraction layer;  
                  sealing the opening of the container; and  
20            incubating and subsequently refrigerating the  
                  contents of the sealed inverted container so that  
                  fermentation of the milk fraction produces yogurt 55  
                  having sufficient gel strength that, upon subsequently  
                  positioning the container in an upright position with  
25            the lid foremost, the yogurt in the bottom of the container  
                  self-supports the fruit fraction layer above it.
2.    The process according to claim 1 in which the  
                  specific gravity of the fruit fraction is greater than  
30            the specific gravity of the liquid milk fraction.

3.    The process according to claims 1 or 2 in which  
                  the liquid milk fraction contains a gum stabilizing agent  
                  for enhancing solidification of the yogurt during the  
35            refrigeration step.

-20-

- 1           4.    The process according to any of claims 1, 2  
or 3 in which the fruit fraction includes a stabilizing  
agent for inhibiting bacterial attack of the fruit  
fraction by the liquid milk fraction.
- 5           5.    The process according to any preceding claim  
in which the container tapers wider from the container  
bottom 14 toward the lid.
- 10          6.    The process according to any preceding claim  
including sealing the opening by inserting a plug 34  
into the opening.
- 15          7.    The process according to claim 6 in which  
the plug has a body which makes a tight friction fit  
in the opening and an outer lip surrounding the body and  
overlying a bottom wall 14 of the container around the  
opening.
- 20          8.    The process according to any preceding claim  
including introducing an edible barrier material 74 to  
the interior of the container above the fruit fraction  
prior to introducing the inoculated liquid milk fraction  
for forming an edible barrier film for inhibiting  
25          intermingling of the fruit fraction and the liquid milk  
fraction at the interface between them.
- 30          9.    The process according to any preceding claim  
in which the edible barrier material comprises a water  
insoluble material having a melting point temperature  
higher than the temperature of the incubation temperature  
of the inoculated liquid milk fraction; and the edible  
barrier material is selected from the group consisting  
of hydrogenated animal fats and hydrogenated vegetable  
35          oils.


-21-

1           10.   A process for filling containers with sundae-  
style yogurt comprising the steps of:  
              introducing into a container 60 a  
              baceteriologically inoculated liquid milk fraction 32  
5           containing a gum stabilizing agent;  
              placing the container having the inoculated  
liquid milk fraction in a sterile environment 68;  
              incubating and subsequently refrigerating the  
liquid milk fraction in the sterile environment so that  
10           fermentation of the milk fraction produces yogurt 72 and  
refrigeration solidifies the gum stabilizer in the yogurt;  
              introducing a fruit fraction layer 76 to the  
container to cover a top surface of the solidified  
yogurt, wherein the fruit fraction has a greater specific  
15           gravity than the liquid milk fraction, the solidified  
yogurt having sufficient gel strength to self-support  
the fruit fraction layer; and  
              applying a removable lid 66 to the top of the  
container to provide yogurt with a fruit fraction topping  
20           immediately beneath the removable lid.

          11.   The process according to claim 10 including  
forming an edible barrier 74 on a top surface of the  
yogurt before the fruit fraction is introduced for  
25           inhibiting intermingling of the fruit fraction and the  
yogurt at the interface between them.

          12.   The process according to claim 11 in which the  
edible barrier comprises a water insoluble material having  
30           a melting point temperature higher than the refrigeration  
temperature of the yogurt; and the edible barrier is  
selected from the group consisting of hydrogenated animal  
fats and hydrogenated vegetable oils.

0002037

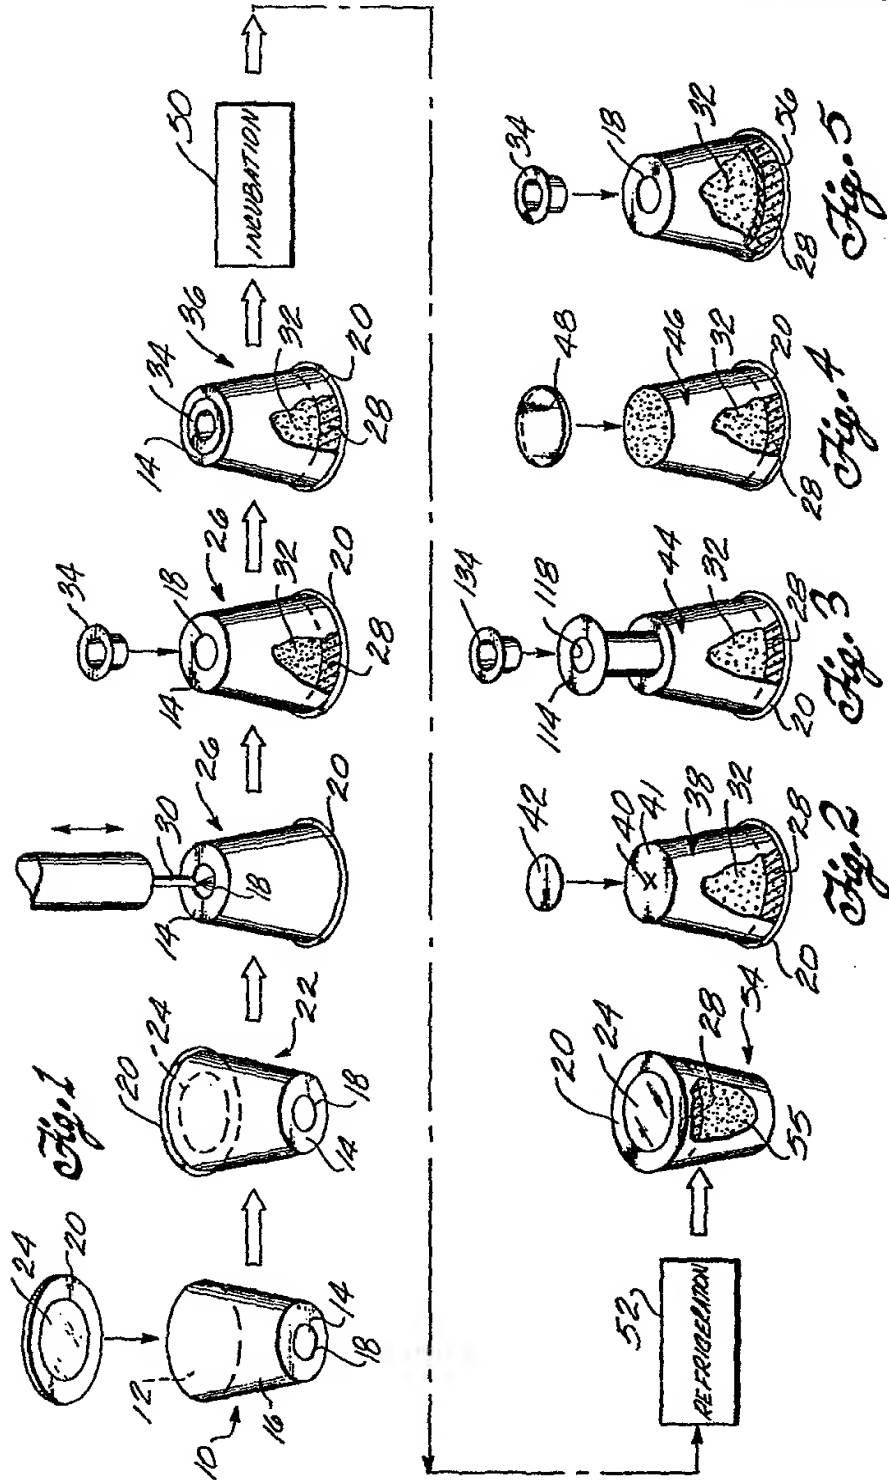

0002037

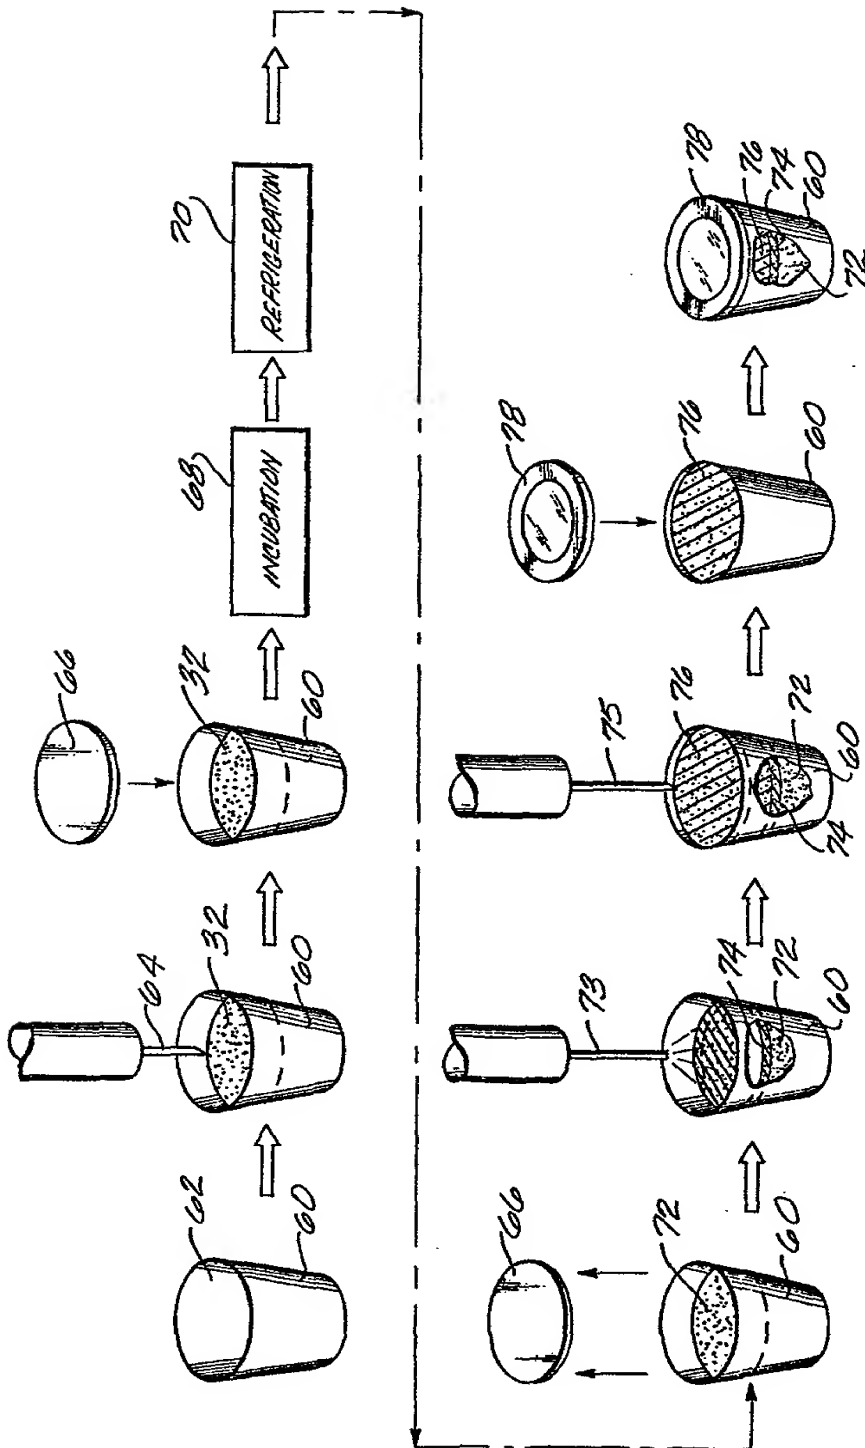


Fig. 6



European Patent  
Office

# EUROPEAN SEARCH REPORT

0002037  
Application Number

EP 78 10 1341

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int. Cl.)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	<u>US - A - 3 269 842</u> (KNUDSEN CREAMERY) * Column 1, lines 15-26; column 2, lines 26-59 *	1	B 65 B 3/04 A 23 C 9/12
A	JOURNAL OF DAIRY SCIENCE, vol. 59, 4 no. 2 (1976-2) MANFRED KROGER "Quality of yoghurt" Department of Food Science, The Pennsylvania State University, University Park 16802, * Page 347, column 2, last paragraph to page 348, column 2, line 19 *	4	TECHNICAL FIELDS SEARCHED (Int. Cl.)  B 65 B A 23 C
A	<u>DE - A - 2 500 224</u> (TOSCARA) * Page 1, paragraph 1; figure 15 *	5	CATEGORY OF CITED DOCUMENTS  X: particularly relevant A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: conflicting application D: document cited in the application L: citation for other reasons  &: member of the same patent family, corresponding document
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
The Hague	14-02-1979	CLAEYS	